

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.


**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61B 10/00	A1	(11) International Publication Number: WO 99/25251 (43) International Publication Date: 27 May 1999 (27.05.99)
<p>(21) International Application Number: PCT/GB98/03431</p> <p>(22) International Filing Date: 13 November 1998 (13.11.98)</p> <p>(30) Priority Data: 97/10284 14 November 1997 (14.11.97) ZA</p> <p>(71) Applicant (for all designated States except US): HARWILL INDUSTRIES (PTY.) LTD. [ZA/ZA]; 2 Vygeboom Avenue, Durbanville, Cape Province 7551 (ZA).</p> <p>(71) Applicant (for MG only): GEMMELL, Peter, Alan [GB/GB]; 25 The Square, Martlesham Heath, Ipswich, Suffolk IP5 3SL (GB).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): FOURIE, Pieter, Rousseau [ZA/ZA]; 2 Vygeboom Avenue, Durbanville, Cape Province 7551 (ZA). VAN DER MERWE, Marius [ZA/ZA]; 2 Vygeboom Avenue, Durbanville, Cape Province 7551 (ZA).</p> <p>(74) Agents: GEMMELL, Peter, Alan et al.; Dummett Copp, 25 The Square, Martlesham Heath, Ipswich, Suffolk IP5 3SL (GB).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>	

(54) Title: MEDICAL SPATULA

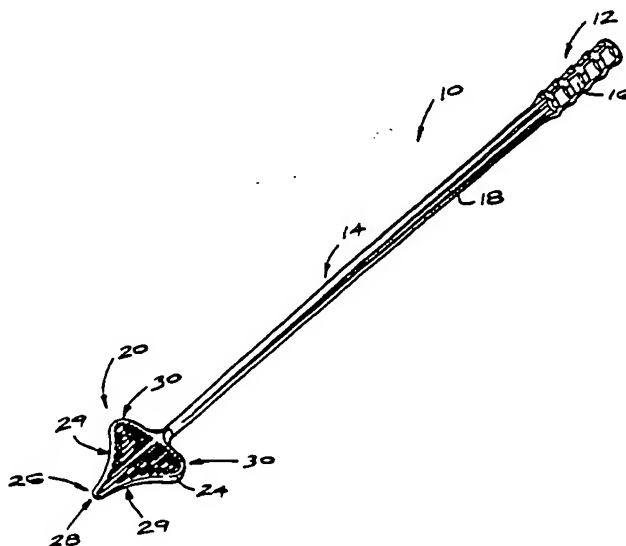

(57) Abstract

This invention relates to a medical spatula that finds particular application as a spatula for exfoliative cytology, such as cervical or vaginal smear tests (PAP tests). The spatula of the invention comprises a grip, made up of a hand grip (12) and an insertion rod (14), and a substantially planar blade (20). The blade (20) consists of an open loop that defines the rim (24) of the blade (20) and a lattice of spaced apart bars (22) that arise from the peripheral rim (24) and transect the body of the blade (20). When adapted for use as a cervical spatula (10), the periphery of the blade is shaped to conform to the shape of the average cervix. The spatula (10) is integrally formed from a resiliently deformable material such as injection moulded plastics, preferably low density polyethylene.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

-1-

MEDICAL SPATULA

Background to the invention

5 This invention relates to a medical spatula.

The spatula finds particular application as a spatula for exfoliative cytology and it will be described with reference to a cervical spatula by way of example.

10

The so-called PAP test, named after the Greek-American physician George Papanicolaou who developed the vaginal smear test in 1928 to diagnose cervical cancer, is probably the most widely used example of exfoliative
15 cytology. PAP tests are normally performed using a hand held scraper or spatula that is used to scrape off the outer cells of the cervix prior to a transfer of the cells to a glass slide for microscopic evaluation.

20 The spatula device in most common use is the wooden AYRE'S spatula. These devices are not without their disadvantages, the AYRE'S spatula being difficult to manipulate without causing discomfort or injury to the patient and giving less than satisfactory results in
25 obtaining adequate endocervical cell samples.

To address these problems, spatula devices that are more flexible have been developed, one of which is the well-known CYTOBRUSH spatula. The CYTOBRUSH is
30 significantly better than the wooden spatula for collecting endocervical cells, but not significantly better for collecting and detecting metaplastic cells. These deficiencies in the CYTOBRUSH spatula may arise because of excessive flexibility.

35

It is an object of this invention to address these

-2-

apparent deficiencies.

Summary of the invention

5 This invention provides a medical spatula comprising a grip and a substantially planar blade including an open loop of a resiliently deformable material extending about the outer periphery of the blade and a lattice of spaced apart bars of a resiliently deformable material
10 that arise from the peripheral loop and transect the body of the blade.

The spatula, in the preferred form of the invention, is adapted for use as a cervical spatula in that the
15 periphery of the blade is shaped to conform to the shape of the average cervical os.

It is appreciated that the shape of the cervical os varies widely from woman to woman and that the shape
20 and consistency of the tissue of the cervical os tends to vary, within the same woman, in dependence on her age, the state of her pregnancy (if any) and the phase of her menstrual cycle.

25 The spatula blade is therefore shaped in essence, to conform to an idealised cervical os. However, the flexibility of the blade is intended to assist in conforming the blade shape to any deviations from the idealised cervical shape that may be exhibited by an
30 actual cervix when the spatula is used.

To this end, the blade is essentially triangular in plan outline, the end of the spatula being constituted by the apex of the triangular blade and the sides of
35 the triangular blade arising from the apex being

-3-

concav in plan outline.

5 All the plan outline corners of the triangular blade are rounded, the base corners being rounded more than the apex, in order to avoid possible discomfort or injury in use.

10 The bars making up the body of the blade may conveniently be constituted by a plurality of non-discrete lands spaced apart from one another by interposed grooves. Some or all of the grooves may be constituted by slots formed to extend through the plane of the blade.

15 In the preferred form of the invention, all the grooves are constituted by slots.

20 The blade and preferably the entire spatula, being the grip and the blade, are integrally formed from a resiliently deformable material such as injection moulded plastics, preferably low density polyethylene.

25 To assist in conforming to the shape of the cervix and also to maximise the scraping action of the blade, without thereby increasing the risk of injury, the blade is adapted to flex in the plane of the blade.

This can be done by tapering the blade either or both longitudinally and transversely.

30

In order further to maximise the scraping action of the blade, the peripheral edges of the blade may be relatively sharp in cross section.

35 The grip may be longitudinally tapered from the hand

-4-

grip end thereof to the point of attachment of the grip to the blade, the narrowing portion of the tapered grip being progressively more flexible up to the point of attachment of the grip to the blade. This is particularly appropriate for a spatula intended to be used as a cervical spatula.

Brief description of the drawings

10 In the drawings:

Figure 1 is a diagrammatic isometric view of a cervical spatula according to the invention;

15 Figure 2 is a plan view of the spatula of Figure 1;

Figure 3 is a side elevation of the spatula of Figure 1;

20 Figure 4 is a cross section through the blade on a line 4 - 4 in Figure 3;

Figure 5 is an enlarged view of one half of the section of Figure 4 (the circled area);

25

Figure 6 is a cross section on a line 6-6 in Figure 3;

30 Figure 7 is an isometric view of an alternative cervical spatula according to the invention;

Figure 8 is a diagrammatic isometric view of yet a further alternative cervical spatula according to the invention;

35

-5-

Figure 9 is a side elevation (partly in section) on a line 9-9 in Figure 8;

5 Figure 10 is an enlarged view of the area circled in Figure 9;

10 Figure 11 is a cross section through one half of the blade of the spatula of Figure 8 taken on a line 11-11 in Figure 8;

Figure 12 is a diagrammatic representation of the cervical spatula of the invention in use;

15 Figure 13 is a diagrammatic representation illustrating the positioning of the spatula blade in the cervical os; and

20 Figure 14 is a diagrammatic representation of the manner in which a cervical cytology sample collected with the spatula of the invention is deposited onto a glass slide.

Description of embodiments of the invention

25

The exfoliative cytology spatula illustrated in the drawings is a cervical spatula 10 that is intended for conducting PAP tests.

30 One of the difficulties faced by the practitioner in conducting PAP tests is to be found in the fact that the cervical passage, in most women, enters the vaginal passage at an angle as is illustrated in Figure 12. However, the practitioner is obliged to insert and
35 manipulate the cervical spatula coaxially with the

-6-

vaginal passage and to make the best of keeping the insertion end of the spatula in constant engagement with the cervical os.

- 5 This is very difficult to achieve during the sampling process, since rotation of the spatula is required.

As a result, the angular deviation of the cervical and vaginal passages makes it difficult to obtain
10 endocervical cells when conducting PAP tests with rigid spatulas such as the AYRE'S spatula.

In order to overcome this difficulty, the CYTOBRUSH spatula was developed. It includes a pair of flexible
15 vanes extending on either side of a nose adapted for insertion into the cervical os during the conduct of the PAP test. Unfortunately, the flexibility of the vanes makes it difficult to obtain metaplastic cells.

20 It is with these difficulties in mind that the cervical spatula of the invention was developed, the intention being to provide a spatula with sufficient deformability in or parallel to the principal axis of the spatula to permit substantial conformity with the
25 shape of the cervical os during rotation of the spatula, but yet sufficient rigidity in the blade plane to perform an adequate scraping operation without hurting or injuring the patient.

30 The cervical spatula 10 of the invention includes a grip comprising a round hand grip 12 on the end of a thin insertion rod 14. The grip 12 is provided with indentations 16 that serve as grip formations. The insertion rod 14 is fluted by means of longitudinally
35 extending indentations 18 which serve to enhance the

-7-

rotational rigidity of the insertion rod 14 without sacrificing the longitudinal flexibility that is required for the proper conduct of PAP tests.

- 5 At its opposite end, the spatula 10 is formed with a flat planar blade 20.

The spatula is integrally moulded from low density polyethylene.

10

- The blade 20 is constituted by a grille or lattice of spaced apart bars 22 bounded by a closed loop 24 of material that defines the outer periphery of the blade 20. The spaces 23 between the bars 22 are formed as
15 open slots that extend through the body of the blade 20, as can be seen more clearly from the cross sections in Figures 4 and 5.

- The blade 20 is symmetrical about a central axis (which
20 is co-axial with the principal axis of the grip 14) and the blade 20 is essentially triangular in plan outline. The insertion end 26 of the spatula is constituted by the apex of the triangular blade and the sides of the triangle arise from the apex to provide a heart-shaped
25 or arrow head-shaped spatula blade 20.

The insertion end of the blade 20 is rounded in plan to define a nose 28 that is designed to enter the cervical os during sampling.

30

- The peripheral rim 24 of the blade 20 curves symmetrically away from the nose 28 on either side thereof. The concave curved areas 29 of the rim 24 is shaped to be complementary to the entrance and ecto-
35 cervical area of the cervix.

-8-

All surfaces of the blade 20 are rounded in order to minimise the risk of injury, pain and discomfort.

5 However, along the line of intersection between the principal plane surfaces of the blade 20 and the periphery 24, the angle of intersection is acute and the point of intersection is relatively sharp. This is to provide relatively sharp rim edges 25 that are
10 designed to maximise cell accumulation during sampling. For the same reason, the same design is used along the lines of intersection between the principal plane of the blade 20 and the edges of the bars 22 to provide sharp edges 27 in these areas as well.

15

The cervical spatula 10.1 illustrated in Figure 7 is similar to the cervical spatula 10 described above with the exception of a smooth insertion rod 14.1 and hand grip 12.1.

20

The cervical spatula 10.2 illustrated in Figures 8, 9, 10 and 11 differs from the cervical spatula 10 and 10.1 described above in several respects. Not only are the insertion rod 14.2 and the hand grip 12.2 different in
25 the spatula 10.2, but the blade 20.2 differs markedly. Instead of being slotted, the blade 20.2 is merely grooved so that the bars are constituted by a number of side-by-side lands 22.2 that are spaced apart from one another by grooves 23.2 interposed between the lands
30 22.2.

In Figures 9, 10 and 11, this aspect is more clearly illustrated. In these drawings, it can be seen that the grooves 23.2 do not extend fully through the body
35 of the blade 20.2. The grooves 23.2 are, however,

-9-

formed on either side of the blade 20.2.

The spatula 10.2 will be more rigid than the spatulas 10 and 10.1 described above if similarly dimensioned
5 and made from similar materials.

The biconcave triangular shape of the blade 20 is designed to permit selective acquisition of cells from the endocervical and ecto-cervical areas of the cervix.
10 The peripheral rim 24 of the blade 20 being constituted, essentially, by a loop of resiliently deformable material, is compliant enough to accommodate most variations in the shape of the cervix.

15 The blade 20 is substantially planar, but as can be seen from the side elevation of Figure 2 and the cross sections of Figures 4 and 5, the blade is tapered in two directions in cross section.

20 In longitudinal cross section, the blade 20 tapers towards the nose 28. The opposing upper and lower plane surfaces of the blade converge from the thicker part of the blade 20, which is the end at which it is attached to the insertion rod 14, towards the nose of
25 28.

In transverse cross section, the blade 20 is inversely tapered so that, in cross section, it is thinner in the middle than it is at the sides, the thickest areas of
30 the blade 20 being the wings 30 that define the base of the blade 20.

In addition, the spatula grip which tapers from the hand grip 12, through the insertion rod 14 to the point
35 of attachment to the blade 20, becomes progressively

-10-

more flexible up to the point of attachment of the grip to the blade 20. This allows the insertion rod 14 to flex progressively more along its length in order to accommodate the angular misalignment of the cervix with the vaginal passage, even during rotation of the spatula. This aspect is illustrated diagrammatically in Figure 12 which illustrates the cervical spatula 10 of the invention in use. In this drawing, the spatula 10 of the invention is inserted into the vagina of a patient through a speculum 32 that permits an unobstructed view of the cervix 34 of the patient.

The practitioner, having inserted the blade 20 through the speculum 32 up to the point where the blade 20 is correctly positioned in the cervix 34, rotates the spatula 10 between her thumb and forefinger to collect a sample of cervical cells.

During rotation of the spatula 10, the insertion rod 14 flexes to accommodate the misalignment of the cervix and the vaginal passage. In addition, the peripheral rim 24 of the blade 20 flexes during rotation in order to accommodate any variations in the shape of the cervix 34 that deviate from the shape of the blade 20.

The rim 24 flexes principally in the plane of the blade 20 with the bars 22 providing relatively little resistance to such flexing. The bars 22 do not detract significantly from the compliance of the peripheral rim 24, yet they contribute to the collection of cells.

During rotation of the spatula 10, in the cervix 34, the blade 20 also flexes in the plane of the blade 20. The degree of flexing is not great and the blade 20 is intended to twist ever so slightly about the principal

-11-

axis of the spatula 10 in helical fashion.

The blade 20, in twisting like this, performs a slightly more aggressive scraping action within the cervix 34, since twisting of the blade presents the edges 25 of the peripheral rim 24 of the blade 20 at a slightly more acute angle of attack during rotation of the blade 20 within the cervix 34. Twisting of the blade 20 also misaligns the bars 22 slightly and presents the edges 27 of the bars to the cervical tissue to a greater extent.

The diagram of Figure 13 illustrates the location of the blade 21 within the cervix 34 in greater detail. In this drawing it can be seen how the tip of the blade 20 penetrates deep into the cervix 34 in order to collect endo-cervical cells. The concave sides 29 of the blade 20 extend from within the cervix to the area adjacent to the entrance of the cervical os, to collect progressively less endo-cervical cells and progressively more ectocervical cells from the central regions of the blade 20 towards the wings 30 at the base of the blade 20.

The blade 20 is sufficiently compliant to accommodate nulli- and multigravidae cervixes.

The spatula 10 of the invention has additional advantages. Not only does it permit the selective acquisition of cells from the endocervical and ectocervical areas, but it allows deposition of the cells on a glass slide for instance, in a similar fashion.

This aspect is illustrated in Figure 14.

-12-

Flat blade spatulas suffer from the disadvantage that the collected sample adheres preferentially to the flat surface of the spatula. In consequence a fair amount of manipulation is required in order to force the sample to adhere to the slide in preference to the spatula to deposit cells collected during the PAP test on the glass slide. Often this results in the practitioner smearing the cells around on the glass slide and losing the original location of the cells in the eventual sample.

The spatula 10 of the invention seeks to overcome this deficiency by permitting more effective deposition of the cells onto a glass slide 36 without the need for excess manipulation.

This is done by using capillarity to assist in depositing the sample onto the slide. When the blade 20 is placed flat on a glass slide, a gap tends to be left between the slide and the tapered nose 28 of the blade 20. This gap is in communication with and co-operates with the slots 23 between the bars 22 in the grille defining the surface of the blade 20. The capillarity of these co-operating capillary spaces assists in drawing the sample from the blade 20 when, in depositing the collected cells on a glass slide, the practitioner draws the blade 20 longitudinally along the glass slide (in the direction of the arrows).

In the process, the practitioner is not required to smear the sample. This means that the blade can be drawn straight down the glass slide, depositing endocervical cells in the centre (40) of the sample and ectocervical cells on either side (42) thereof. This will allow the pathologist to examine the slide knowing

-13-

that cells can be distinguished as to their origin.

The spatula 10 of the invention therefore has the advantage that it permits the selective acquisition of
5 cells from the endocervical and ecto-cervical areas.
In addition, it allows deposition of the cells in a similar fashion.

-14-

Claims

1. A medical spatula (10) comprising a grip and a
5 substantially planar blade (20) characterised by
the provision of an open loop (24) of a
resiliently deformable material extending about
the outer periphery of the blade (20) and a
10 lattice of spaced apart bars (22) of a resiliently
deformable material that arise from the peripheral
loop (24) and transect the body of the blade (20).
2. A spatula according to claim 1 that is adapted for
use as a cervical spatula (10) in that the
15 periphery (24) of the blade (20) is shaped to
conform to the shape of the average cervical os,
the blade (20) being triangular in plan outline,
the end (28) of the spatula being constituted by
the apex (28) of the triangular blade (20) and the
20 sides (29) of the triangular blade arising from
the apex being concave in plan outline.
3. A spatula according to either of the preceding
claims in which the bars (22) are constituted by a
25 plurality of non-discrete lands (22.2) spaced
apart from one another by interposed grooves
(23.2).
4. A spatula according to claim 3 in which at least
30 some of the grooves (23.2) are constituted by
slots (22) formed to extend through the plane of
the blade (20).
5. A spatula according to claim 4 in which all the
35 grooves are constituted by slots (23).


-15-

6. A spatula according to any one of the preceding claims in which the blade (20) is integrally formed from a resiliently deformable material.
- 5 7. A spatula according to claim 6 in which the blade (20) and grip are integrally formed from a resiliently deformable material.
- 10 8. A spatula according to any one of the preceding claims in which the blade (20) is adapted to flex in the plane of the blade (20), the blade (20) being tapered in longitudinal cross-section, the opposing plane surfaces of the blade (20) converging from a thicker part of the blade (20) at the point of attachment of the grip to the blade (20) towards a thinner part of the blade (20) at the end of the blade (20) opposite the point of attachment of the grip to the blade.
- 15 9. A spatula according to any one of the preceding claims in which the blade (20) is adapted to flex in the plane of the blade (20), the blade (20) having a double taper in transverse cross-section in that the opposing plane surfaces of the blade (20) converge from the longitudinally extending edges of the blade (20) towards the longitudinally extending centre line of the blade (20).
- 20 10. A spatula according to any one of the preceding claims in which the peripheral edges (25, 27) of the blade (20) are relatively sharp in cross section.
- 25 11. A spatula according to any one of the preceding claims in which the grip is longitudinally tapered


-16-

from a hand grip (12) end thereof to the point of attachment of the grip to the blade (20), the narrowing portion (14) of the tapered grip being progressively more flexible up to the point of attachment of the grip to the blade (20).




- 5
12. A cervical spatula according to any one of the preceding claims.
- 10 13. A spatula substantially as described in this specification with reference to the accompanying drawings.

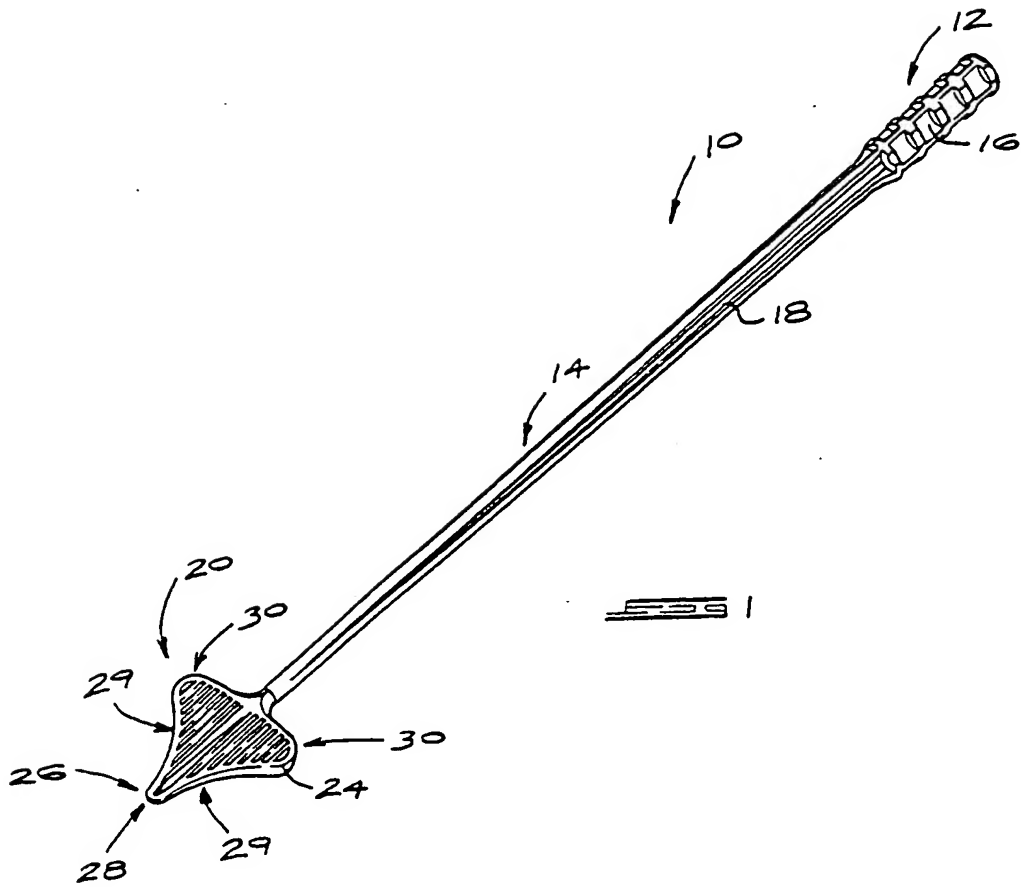


2/7

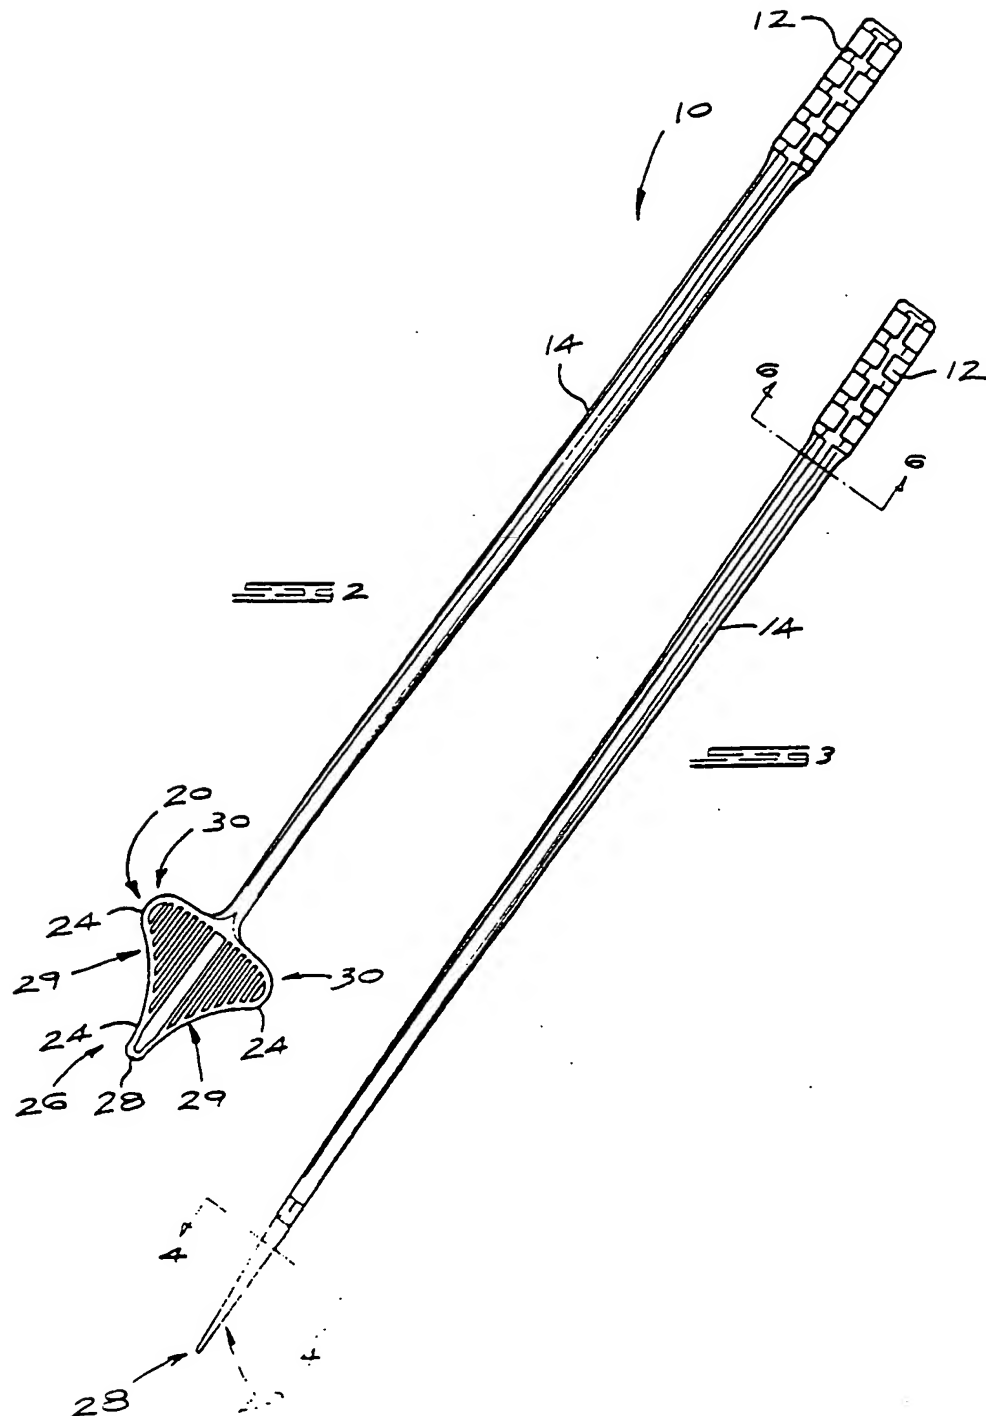


3/7

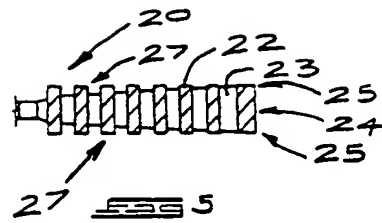

4/7

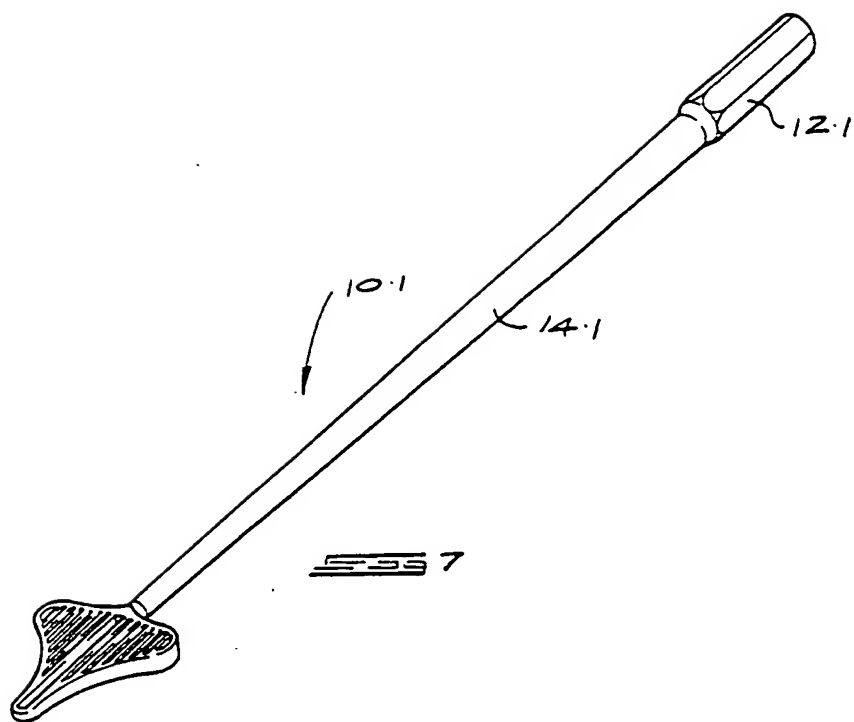

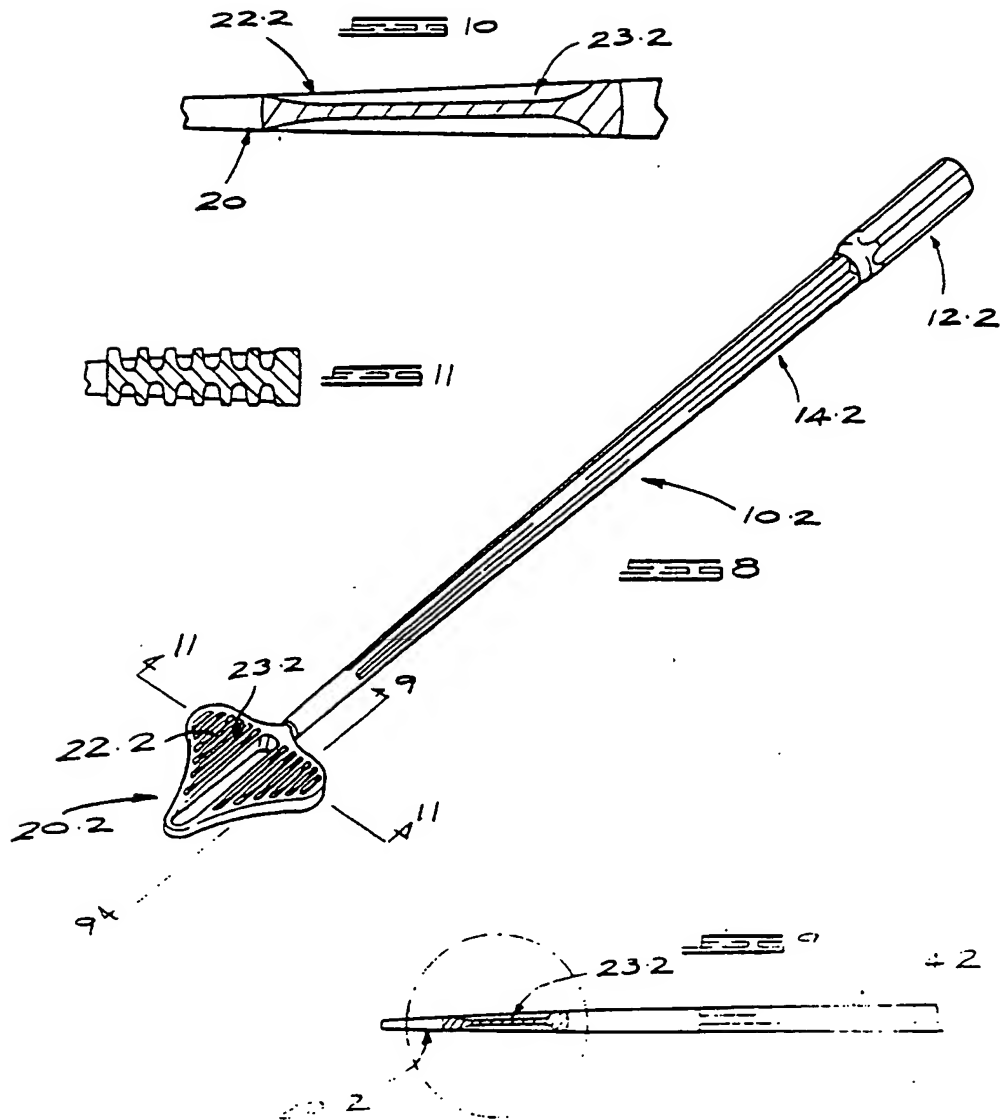

6/7



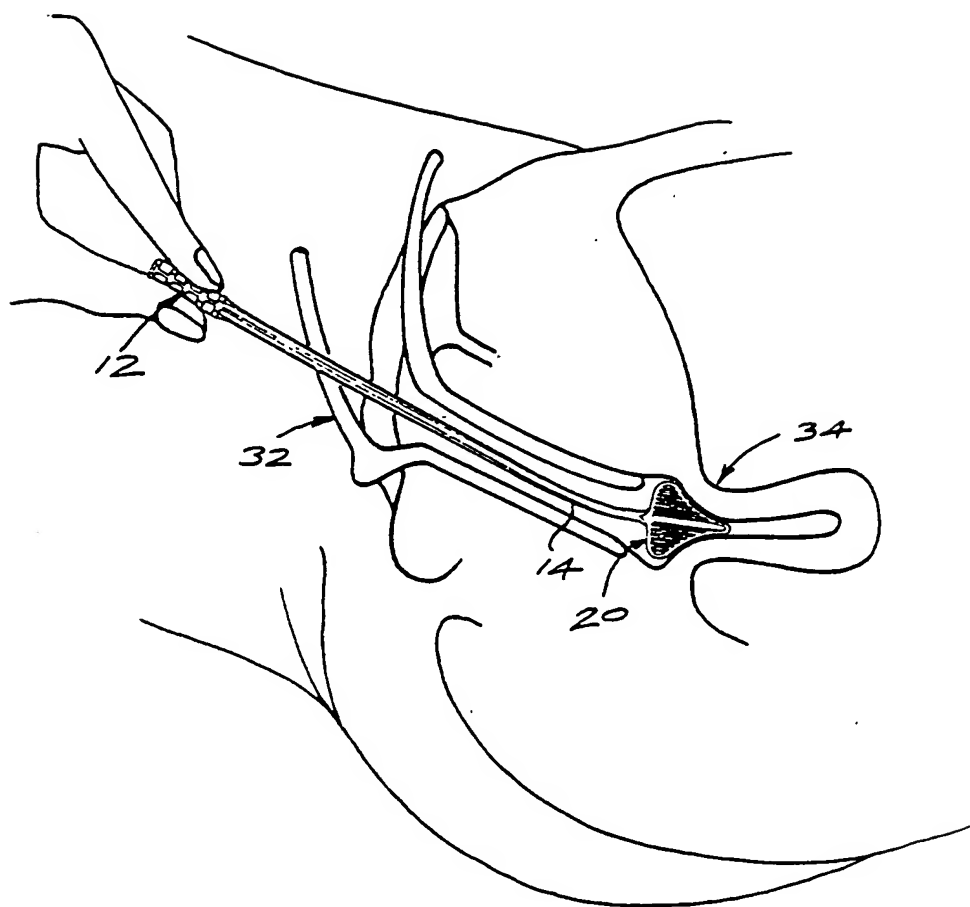


FIG 12

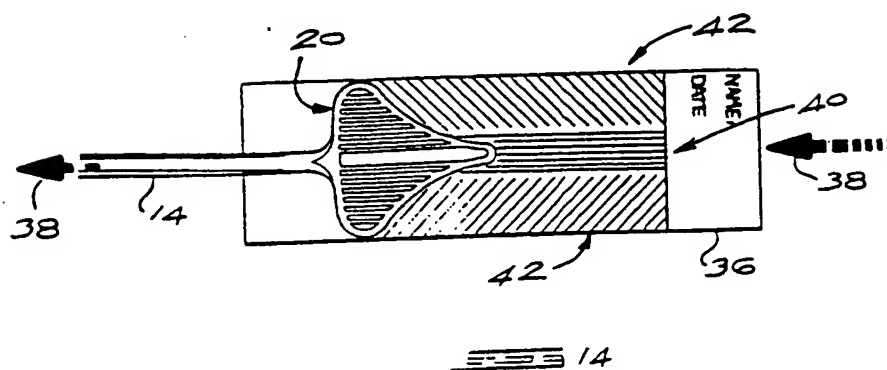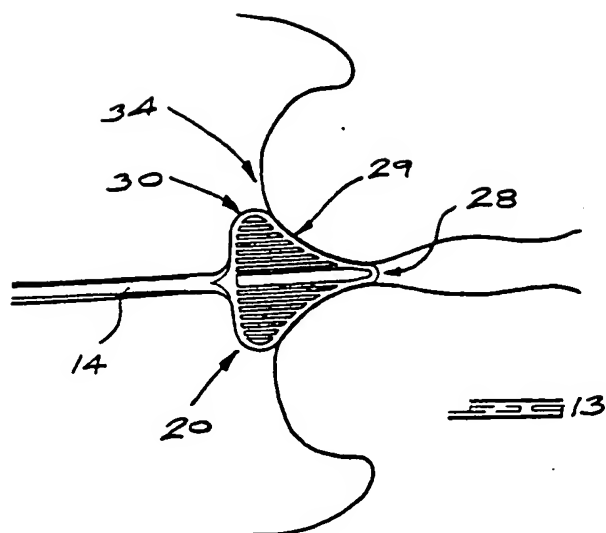

INTERNATIONAL SEARCH REPORT

International Application No

PCT/G8 98/03431

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A61B10/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 94 09704 A (LONSTEN PTY LTD ; STENNING HENRY MARTIN (AU)) 11 May 1994 see page 7, line 15 - page 10, line 24; figures 1,2 ---	1, 13
A	WO 93 01749 A (LONSTEN PTY LTD) 4 February 1993 see abstract; figures 1,3 ---	1, 13
A	EP 0 106 461 A (PISTOFIDIS GEORGE) 25 April 1984 see page 3, line 35 - page 4, line 24; figures 1,2 ---	1, 13
A	US 2 471 088 A (AYRE J E) 24 May 1949 see the whole document ---	1, 13
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

24 February 1999

Date of mailing of the international search report

02/03/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Hansen, S

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/03431

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 881 464 A (LEVENE MAX MOSES) 6 May 1975 see abstract; figure 1 ----	1,13
A	US 4 759 376 A (STORMBY NILS) 26 July 1988 see abstract; figure 2 -----	1,13

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inte 'onal Application No

PCT/GB 98/03431

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9409704 A	11-05-1994	AU 5331794 A CA 2146574 A EP 0666725 A NO 951534 A PL 308486 A	24-05-1994 11-05-1994 16-08-1995 21-04-1995 07-08-1995
WO 9301749 A	04-02-1993	AU 655495 B CA 2113088 A EP 0594786 A JP 6509003 T	22-12-1994 04-02-1993 04-05-1994 13-10-1994
EP 0106461 A	25-04-1984	AT 27680 T AU 1909483 A JP 59064033 A ZA 8306576 A	15-06-1987 22-03-1984 11-04-1984 25-04-1984
US 2471088 A	24-05-1949	NONE	
US 3881464 A	06-05-1975	GB 1408140 A DE 2259582 A JP 1145204 C JP 48065792 A JP 57031905 B	01-10-1975 14-06-1973 12-05-1983 10-09-1973 07-07-1982
US 4759376 A	26-07-1988	CA 1264135 A GB 2159420 A,B	02-01-1990 04-12-1985